


# 8MP EXPLOSION PROOF CAMERA FOR MINING

## ENC-HBUAM-100R-47

### FEATURES

- Starlight Illumination
- SS316L Stainless Steel Construction (Optional SS304)
- 2.7~13.5 mm Motorized Lens
- Smart IR up to 100 m
- ONVIF Profile (S, G, T, M)
- Triple Stream
- Audio and Alarm Support
- IP68

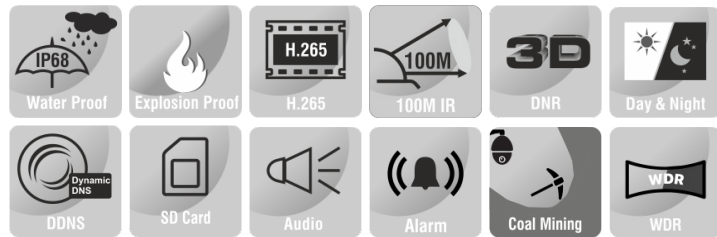

### SPECIFICATION

MODEL		Model No.	ENC-HBUAM-100R-47
CAMERA		Type	8MP EXPLOSION PROOF CAMERA FOR MINING
		Image Sensor	1/2.8" CMOS Progressive 8.0 MegaPixel
		Day / Night	IR Cut Filter with Auto Switch
		Lens Type	Motorized
		Focus	Auto / Manual
		Lens Mount	Φ14
		Focal Length	2.7~13.5 mm
		Angle of View (H)	106.7° ~ 31.5°
		Angle of View (V)	57.3° ~ 17.8°
		Angle of View (D)	130.9° ~ 34.8°
		Angle Adjustment	Bracket; Pan: 0°~360°, Tilt: 0°~90°, Rotate: 0°~360°
		Aperture Range	F1.6
		Electronic Shutter	1s ~ 1/100,000s Auto / Manual
		Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
		AGC	Auto / Manual
		Digital Noise Reduction	3D DNR
		S/N Ratio	≥60 dB
		Defog	Smart Defog
		WDR	120dB
		Smart IR	Up to 100 m
		Wavelength	850 nm

★Product specification and availability are subject to change without notice.

# 8MP EXPLOSION PROOF CAMERA FOR MINING

## ENC-HBUAM-100R-47


MODEL	Model No.	ENC-HBUAM-100R-47
	Type	8MP EXPLOSION PROOF CAMERA FOR MINING
DORI	Lens	2.7 ~ 13.5 mm
	Detection	77.0 ~ 331.0 m
	Observation	30.5 ~ 131.0 m
	Recognition	15.5 ~ 66.0 m
	Identification	7.5 ~ 33.0 m
VIDEO	Max. Resolution	3840x2160
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (3840x2160, 3072x2048) @ 25/30fps, (2560x1440, 2304x1296, 1920x1080, 1280x720) @ 25/30fps, Sub Stream: (704x480, 704x240, 640x480, 352x240) @ 30fps, (704x576, 704x288, 640x480, 352x288) @ 25fps Third Stream: ((1280x720, 704x480, 704x240, 640x360, 352x240) @ 30fps, ((1280x720, 704x576, 704x288, 640x360, 352x288) @ 25fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate (1~30FPS)
	Video Bit Rate	32 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes (16x16, 32x32, 48x48, 64x64, 96x96), Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711A, G.711U, ADPCM_D, AAC_LC
	Audio Bit Rate	8 kbps, 32 kbps, 48 kbps
	Audio I/O	1/1
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Running, Abandoned Object (Object Left), Missing Object (Object Lost), Parking
	Statistical Analysis	Face Detection (Capture), People Counting, Crowd Detection, On Duty Detection, Helmet Detection, Human & Vehicle Classification, Abnormal Video & Audio Detection, Heatmap
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, IP & MAC Address Conflict, Disk Alarm (Full & RW Error), FTP Server Exception, Abnormal Voltage, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notification	E-mail(Notification & Snapshot), HTTP(Alarm icon), FTP(Snapshot & Recording), SD Card(Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, NFS, DHCP, DNS, DDNS, RTP, RTSP, RTCP, RTMP, PPPoE, NTP, UPnP, SMTP, SRTP, (SSL/TLS), IGMP, 802.1X, QoS (DSCP), Unicast, Multicast, ARP, SNMP, SSL, SFTP (SSH), P2P
	Security	AES Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/API/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	2/1
	Serial Interface	1xRS485
	Edge Storage	Micro SD card slot, up to 512 GB
	ANR	Supported
	Built-in Heater	Supported (Optional)
	Cable Interface	Pig Tail
	Remote Connection	≤7
Client Application	EyeConnect	
Web Language	16	

# 8MP EXPLOSION PROOF CAMERA FOR MINING

## ENC-HBUAM-100R-47

MODEL		ENC-HBUAM-100R-47
	Model No.	ENC-HBUAM-100R-47
	Type	8MP EXPLOSION PROOF CAMERA FOR MINING
GENERAL	Power Supply	AC 100 ~ 240V, PoE+ (IEEE 802.3at)
	Max. Power Consumption	≤30W
	Working Temperature	-40 °C ~ 70 °C
	Working Humidity	≤95% RH (non-condensing)
	Atmospheric Pressure	80 kPa ~ 106 kPa
	Window Glass	Strong Tempered Glass
	Surge Protection	TVS4000V
	Ingress Protection	IP68
	Reset Button	Supported
	Dimensions	417.5x360x170.6 mm
	Net Weight	13 kg

Dimension Unit : mm

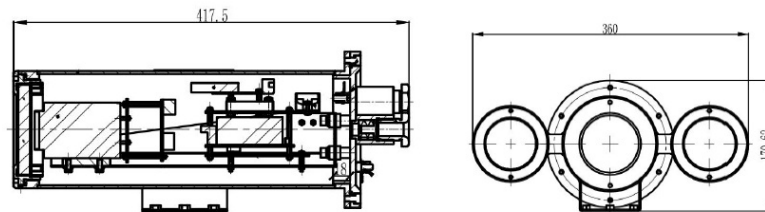

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBUAM-100R-47	8MP SS316L (optional SS304) Group I (Mines) Energized Ma, Mb Bullet Camera with 2.7 to 13.5mm Motorized Lens, PoE+, SD Card Slot, WDR, Smart Analytics, and 100m IR Support	1
ENB-BZUW68	Wall Mount Bracket for Norden Explosion / Corrosion Proof Bullet Camera	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBUAM-100R-47	Carton Box	-	-